

10.1" Rugged LCD Monitor

Model XCM-101



The AbraxSys Difference:

- True Industrial Grade LCD Panel
- Long-Life Advanced LED Backlighting, over 75,000 MTBF
- 388 nits (cd/m²) Brightness
- Wide Operational Temperature Range -10°C to 65°C (14°F to 149°F)
- High Environmental Performance and Reliability
- Multiple Input Formats
- Wide Aspect Ratio
- Ultra-Wide Viewing Cone
- Engineered, Produced, and Supported in the USA
- Multi-Touch Projected Capacitive Touch Screen (up to 10-touches)
- Exceptional Contrast
- 1-Year Warranty

The XM-104 is an exceptional Daylight Readable, ultra-high-quality, durable LCD. The product boasts a 10.1" viewable area with 1280x800 pixels, 388 nits luminance, and an impressive 600:1 contrast ratio. This ruggedized monitor is designed for use throughout a wide range of demanding applications. This harsh-duty display is rigorously tested to ensure compliance with various industry standards and is engineered to withstand the effects of severe temperature environments and direct sun. This model performs well beyond ordinary

'commercial' type monitors and is ideal for use in many tough conditions. Our Multi-touch sensors are typically constructed thick cover glass, meaning they are durable enough to withstand most impacts and extreme applications. Our specialty is harsh-duty touch screens for use in demanding applications where robust impact-resistant touch screens are paramount, our hardening and laminated glass optimizes the impact and scratch resistance while ensuring high transparency of the panel. Polycarbonate cover glass, while durable, is not stable in sunlight and offers MUCH lower scratch resistance than our hardened glass.



PRODUCT SPECIFICATIONS

Display Size	10.1
Display Type	Long-Life Industrial Grade Active Matrix LCD
Backlight Technology	Solid State, Long-Life LED - CLICK HERE for more information 75,000 Hours Half-Life
Brightness	388 nits
Optical Films Enhancements	Boosts efficiency of the backlight's light utilization and minimizes the surface reflection of ambient light. The result is a transmissive enhancement that features higher contrast and a wider range of colors, even in bright outdoor light, than traditional reflective LCDs. CLICK HERE for more information.
Contrast Ratio	600:1
Aspect Ratio	16:10
Resolution (Max)	1280 x 800 (WXGA) Native
Colors Supported	16.7M
Viewing Angles	-80° ~ 80° horizontal, -80° ~ 80° vertical
Ultra-Response time (std)	25 msec.
Video Inputs	VGA (HD15), DVI, HDMI
Touch Screen	Optically Bonded 10-point Projected Capacitive with UV-stable OCA [GG]
Touch Interface	Ethernet to act as USB interface
Touch Cycles	50 Million
Optical Bonding	Optical Bonding of PCAP Touch Screen Window to the Face of the LCD
OSD	Push Button OSD
Power Types	12V DC (other types available)
Power consumption (std)	Display only: 35W (Typ.)

PHYSICAL ATTRIBUTES

Touch Window Integration	Mounted FLUSH with the front bezel
--------------------------	------------------------------------





Enclosure	Textured Black Powder-Coated High Zinc-Oxide Dipped Rear Board Cover
Versatile Mounting Methods	Panel Mounting by Adjustable 'Clips', 75 or 100 mm VESA mounting, Open Bracket mounting
Active area dimensions	216.6mm x 135.4mm
Display size (mm) WxHxD	274.5mm x 174.5mm x 53.5mm
Weight (approx)	7.7lbs (3.5kg)
Warranty Period	1 Year

ENVIRONMENTAL

Sunlight Readability	The latest optical technology for high ambient light conditions
Efficiency	Energy Efficient, Low Power Consumption
Design	High Environmental Performance and Reliability
Operating Temperature Range	-10°C to 65°C (14°F to 149°F)
Storage Temperature	-20°C to 65°C (-4°F to 149°F)
Fasteners	Vibration-proof, self-locking, fastener system which will not loosen regardless of seat torque. Designed to help make products safer, lower warranty costs and prolong equipment life by eliminating vibration; increased safety, reliability, operating life and reduced maintenance.
Humidity	Operating: 20% to 80% (no condensation); Storage: 10% to 90% (non-condensing)
EMI	FCC Class B pursuant to Part 15 of the FCC Rules
Agency Compliance	CE, FCC, RoHS, HDMI
RoHS Compliant	Yes



PUSH BUTTON ON-SCREEN DISPLAY (OSD) CONTROLS

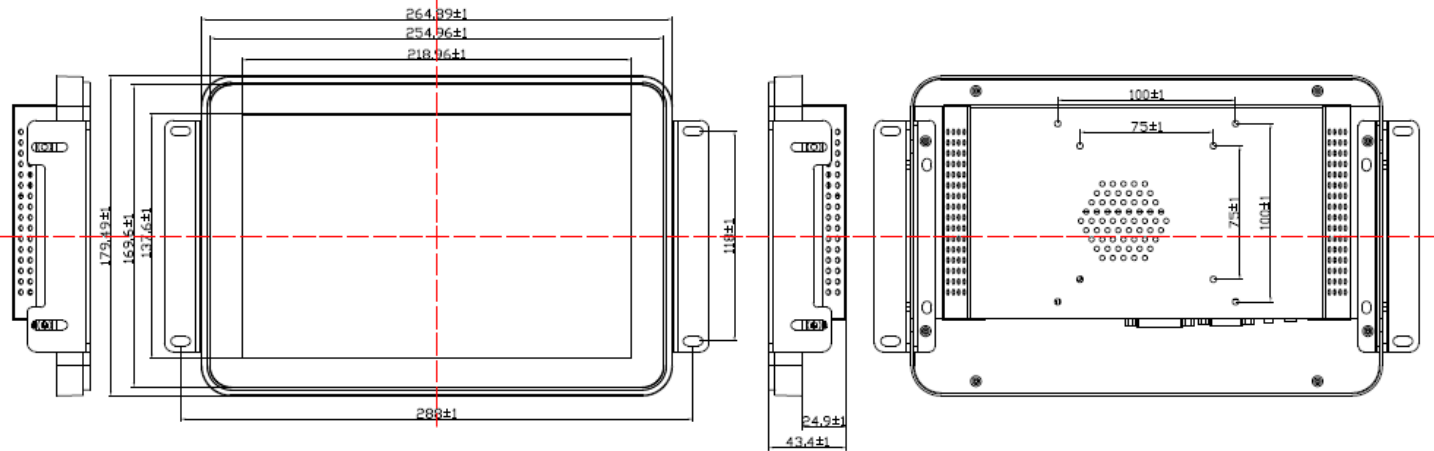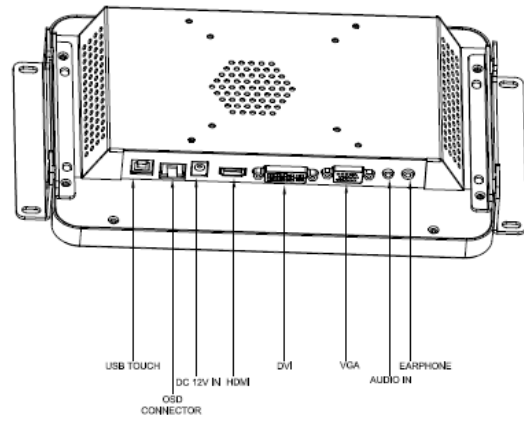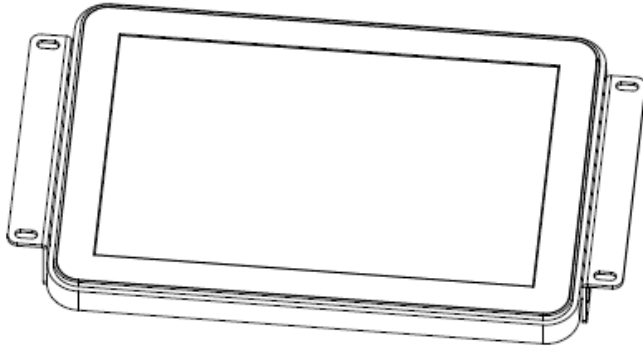

These technical and mechanical resources are subject to change without notice.



6161 Keller's Church Road
 Units 6151B, 6161A, 6161B, 6171A & 6171B
 Pipersville, Pennsylvania 18947 U.S.A.

TEL (800) 883-9050

info@abraxsyscorp.com | www.abraxsyscorp.com

