



**AbraxSys**  
RUGGED LCD SOLUTIONS



# 18.5" Ultra-Rugged Sunlight Readable NEMA 4 (IP65) Rugged Wide Format 1080P Panel Mount LCD Monitor

**Model SRD-PM-185**



Model SRD-PM-185 LCD monitor is a true daylight readable high brightness NEMA 4 (IP65) rated product and utilizes the latest 18.5" 1920 x 1080 resolution TFT Flat Panels. AbraxSys has added a versatile Analog-Digital interface board, backlight inverter and OSD controls. All elements, including a toughened glass protective screen have been packaged in a compact, rugged metal housing. The result is a flexible Display Head, ready for integration as part of any system; as an analog monitor, or a touchscreen driven human-machine interface.

This industrial grade Sunlight Readable NEMA 4 IP65 LCD TFT monitor is designed for use throughout a wide range of harsh outdoor applications. These rugged daytime viewable LCD displays are rigorously tested to ensure compliance with various industry standards and are engineered to withstand the effects of severe environments such as water, dust and dirt intrusion. These products perform well beyond ordinary 'commercial' type monitors. AbraxSys' high bright Sunlight Readable LCDs are ideal for use in any high ambient light condition, and will give you the intensity and brilliance your application requires.

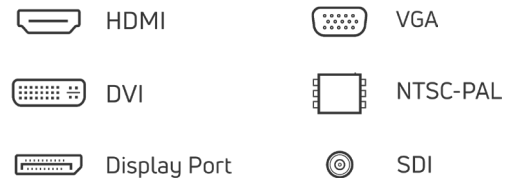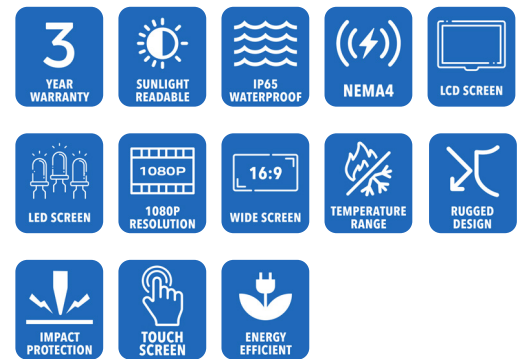

# Technical Specifications

---

## General

**Model:**  
SRD-PM-185

**Display Size**  
18.5"

**Display Type**  
Long-Life Industrial Grade Active Matrix TFT LCD

**Backlight Technology**  
IPS (In-Plane Switching technology) panel, for more information [CLICK HERE](#)

**Optical Films Enhancements**  
Boosts efficiency of the backlight's light utilization and minimizes the surface reflection of ambient light. The result is a transmissive enhancement that features higher contrast and a wider range of colors, even in bright outdoor light, than traditional reflective LCDs.

**Brightness**  
1500 nits (cd/m2)

**Dimming Capabilities**  
Front Keypad (can also be configured for rear controls)

**Contrast Ratio**  
1000:1

**Aspect Ratio**  
16:9

**Resolution**  
1920 x 1080 (1080p)

**Colors Supported**  
16.7M (8-bit/color)

**Viewing Angles**  
-88° to 88° Horizontal  
-88° to 88° Vertical

**Video Inputs**  
DVI, HD15 (VGA), HDMI, DisplayPort, S-Video, SDI, Composite

**User Controls**  
Multi-Functional User Keypad

**Protective Window**  
3mm Hardened Protective Window, for more information [CLICK HERE](#) (also available various optional Touch Screen Technologies)

**Power Types**  
90 VAC to 264 VAC; 12V DC; 24V DC; 9 to 36V DC; or 20 to 53V DC

---

## Physical Attributes

**Front Bezel**  
High Grade 6061T Aluminum, Electrochemical Anodized for added Corrosion Resistance, Black Textured Finish per Military Standards FED-STD-595

**Rear Enclosure**  
High Grade 6061T Aluminum, Electrochemical Anodized for added Corrosion Resistance, Black Textured Finish per Military Standards FED-STD-595

**Weight**  
18 lbs. (8.1 Kg)

**Sealability**  
NEMA 4X (IP66)

**Sunlight Readability**  
The latest optical technology for high ambient light conditions

**Warranty Period**  
3 Years

## Environmental

### Sunlight Readability

The latest optical technology for high ambient light conditions

### Operating Temperature Range

-20°C to 70°C (-4°F to 158°F)

### Storage Temperature

-20°C to 70°C (-4°F to 158°F)

### Humidity

5% to 95% RH (non-condensing)

### Shock

Operating: 30g's, 11ms, ½ Sine

### Vibration

1g RMS 20-500Hz

### Fasteners

Vibration-proof, self-locking, fastener system

### EMI

FCC Class B pursuant to Part 15 of the FCC Rules

### Agency Compliance

CE

### Altitude

Operating 0 to 10,000 ft.  
Storage 0 to 40,000 ft.

### RoHS Compliant

Yes

### Rating

NEMA 12 / IP52

---

## Additional Add-On Options

### Touch Screen Technology

#### Resistive

#### Multi-Touch Up to 10-Point PCAP

#### Hardened Armored Touch Technology

### Power Type Choices

90 VAC to 264 VAC; 12V DC; 24V DC; 9 to 36V DC; or 20 to 53V DC

### Video Input Options

DVI, HD15 (VGA), HDMI, DisplayPort, NTSC-PAL, Composite, S-Video, and/or SDI

### Extended Operational Temperature Ranges

### Custom Video Modes

### Conformal Coating of all Internal Circuit Boards

### Customization Services

#### Dimming Capabilities

Standard, or Optional Full-Range Manual Turn-Pot, Automatic Dimming Sensor, Remote Dimming

#### NEMA 4X IP66 Stainless Steel Front Bezel

#### Private Labeling Services

