




AbraxSys
RUGGED LCD SOLUTIONS

24" Industrial NEMA 4 (IP65) Panel Mount Touch Screen Computer

Model PC2-PM-240

This series of rugged sunlight readable panel PCs is the ultimate solution for outdoor embedded computing and are ideally suited for high ambient light environments where dust, dirt, moisture, splashing water, hose directed spray, and various other caustic contaminants like oil, chemicals, etc. are commonplace. This advanced series features Standard: Intel 11th Generation Core I5-1145GRE (8M Cache, up to 4.10 GHz), 240GB Solid-State Drive (higher capacity available), 8GB memory (expandable to 32GB), a vast array of I/O and Ethernet ports, Intel's Tiger Lake graphics chipset, solid-state long-life LED backlighting, solid-state storage devices, and exceptional temperature ranges: Operating Temperature: -20°C to +60°C (14°F to 140°F).

As well, a multitude of add-on features are available to meet our customer's specific requirements.

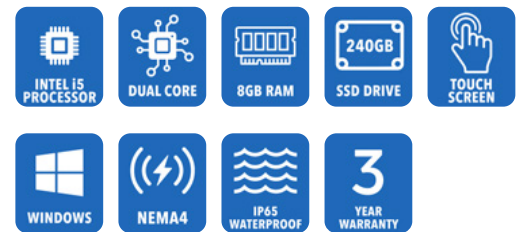

Technical Specifications

Computer Specs

CPU

- Intel® Core™ i5-1145G7E (up to 4.1GHz, quad-core, 8M Cache, TDP: 28/15/12W)
- Tiger Lake 11th generation Intel Core processors

Chipset

I/O Chipset EC iTE IT8528E

Graphics Chipset

Intel® Iris® Xe Graphics, 12th Generation

Intel's Boost Technology

Max Turbo Frequency of 4.10 GHz

Storage

240GB Solid State
[Optional larger capacity drives also available]

Memory

8GB expandable to 16GB or 32GB

I/O

- USB:
 - 4xUSB 3.0
 - 4xUSB 2.0
- Com Port:
 - 2 x RS-232/422/485
 - 4 x RS-232 Out (other ports available, please let us know what is needed)

Ethernet

- 1 x Intel® I225IT 2.5 Gigabit Ethernet (LAN2), 1 x Intel® I219LM Gigabit Ethernet PHY (LAN1),
- 3 x USB3.1 Gen2, 1 x USB 3.1 Gen1 at I/O

Operating System

Windows 10 IoT Enterprise Operating System
[Optional Win 10 Pro or Win 11 Pro also available]

General

Model:

PC2-PM-240

Display Size

24.0"

Display Type

Long-Life Industrial Grade LCD

Backlight Technology

Solid State, Long-Life LED, with Light Source Redundancy

Optical Films Enhancements

Optical Bonding

Brightness

300 nits (cd/m2)

Dimming Capabilities

Optional Full-Range Manual Turn-Pot, Automatic Dimming Sensor, Remote Dimming

Contrast Ratio

1000:1

Aspect Ratio

16:10

Resolution

1920 x 1200 (WUXGA)

Colors Supported

16 million

Viewing Angles

-89° / 89° Horizontal
-89° / 89° Vertical

Video Inputs

DVI, HD15 (VGA), DisplayPort, Composite, S-Video, HD-SDI, 4-Composite/NTSC-PAL, HDMI

Optical Bonding

Optical Bonding

Protective Window

Power Types

90 VAC to 264 VAC, 12V DC, 24V DC, 9 to 36V DC, 20 to 53V DC

Physical Attributes

Front Bezel

High Grade 6061T Aluminum, Electrochemical Anodized for added Corrosion Resistance, Black Textured Finish per Military Standards FED-STD-595

Rear Enclosure

High Grade 6061T Aluminum, Electrochemical Anodized for added Corrosion Resistance, Black Textured Finish per Military Standards FED-STD-595

Panel Mounting

10-32 Stainless Mounting Studs, 1/2" Exposed Thread

Overall Dimensions

See Drawings

Cutout

15.53 x 23.08 in
(394.46 x 586.23 mm)

Weight

~20 lbs.

Sealability

NEMA 4 (IP65)

Sunlight Readability

Sunlight Readable Model Available

Warranty Period

3 Years

Environmental

Sunlight Readability

Sunlight Readable Model Available

Operating Temperature Range

-10°C to 60°C (14°F to 140°F)
Extended Operational Temperature Ranges Available

Storage Temperature

-40°C ~ 75°C (-40°F ~ 167°F)

Humidity

5% to 95% RH (non-condensing)

Shock

Operating: 30g's, 11ms, ½ Sine

Vibration

Operating: 1g RMS 20-500Hz

Fasteners

Vibration-proof, self-locking, fastener system which will not loosen regardless of seat torque. Designed to help make products safer, lower warranty costs and prolong equipment life by eliminating vibration; increased safety, reliability, operating life and reduced maintenance.

EMI

FCC Class B pursuant to Part 15 of the FCC Rules

Agency Compliance

CE

Altitude

Operating 0 to 10,000 ft.
Storage 0 to 40,000 ft.

RoHS Compliant

Yes

Rating

NEMA 4 / IP65

Additional Add-On Options

Touch Screen Technology
NEMA 4 – IP65

Custom Video Modes

Resistive

Multi-Touch Up to 10-Point PCAP

Hardened Armored Touch Technology

Customization Services

Power Type Choices
90 VAC to 264 VAC; 12V DC; 24V DC; 9 to 36V DC; or 20 to 53V DC

Conformal Coating of all Internal Circuit Boards

Private Labeling Services

Customization Services

Dimming Capabilities
Standard, or Optional Full-Range
Manual Turn-Pot, Automatic
Dimming Sensor, Remote Dimming

UltraSlim 4K/60 HDMI 2.0 Extender over HDBaseT™ up to 330ft & PoH Extend pristine 4K/60 with HDR, 4:4:4 with bi-directional IR, RS-232 & LAN
Click for More Info

Sunlight Readable Model Available

PCI Expansion

NEMA 4X IP66 Stainless Steel Front Bezel

Optical Bonding

Sunlight Readable Model Available

Dual Ethernet Ports

Sunlight Readability Model

Operating Systems
Windows 10 IOT Enterprise


Larger Storage Devices

Dual Drive Support available

RAID Support

Wi-Fi (wireless networking technology)

Mechanical Drawings

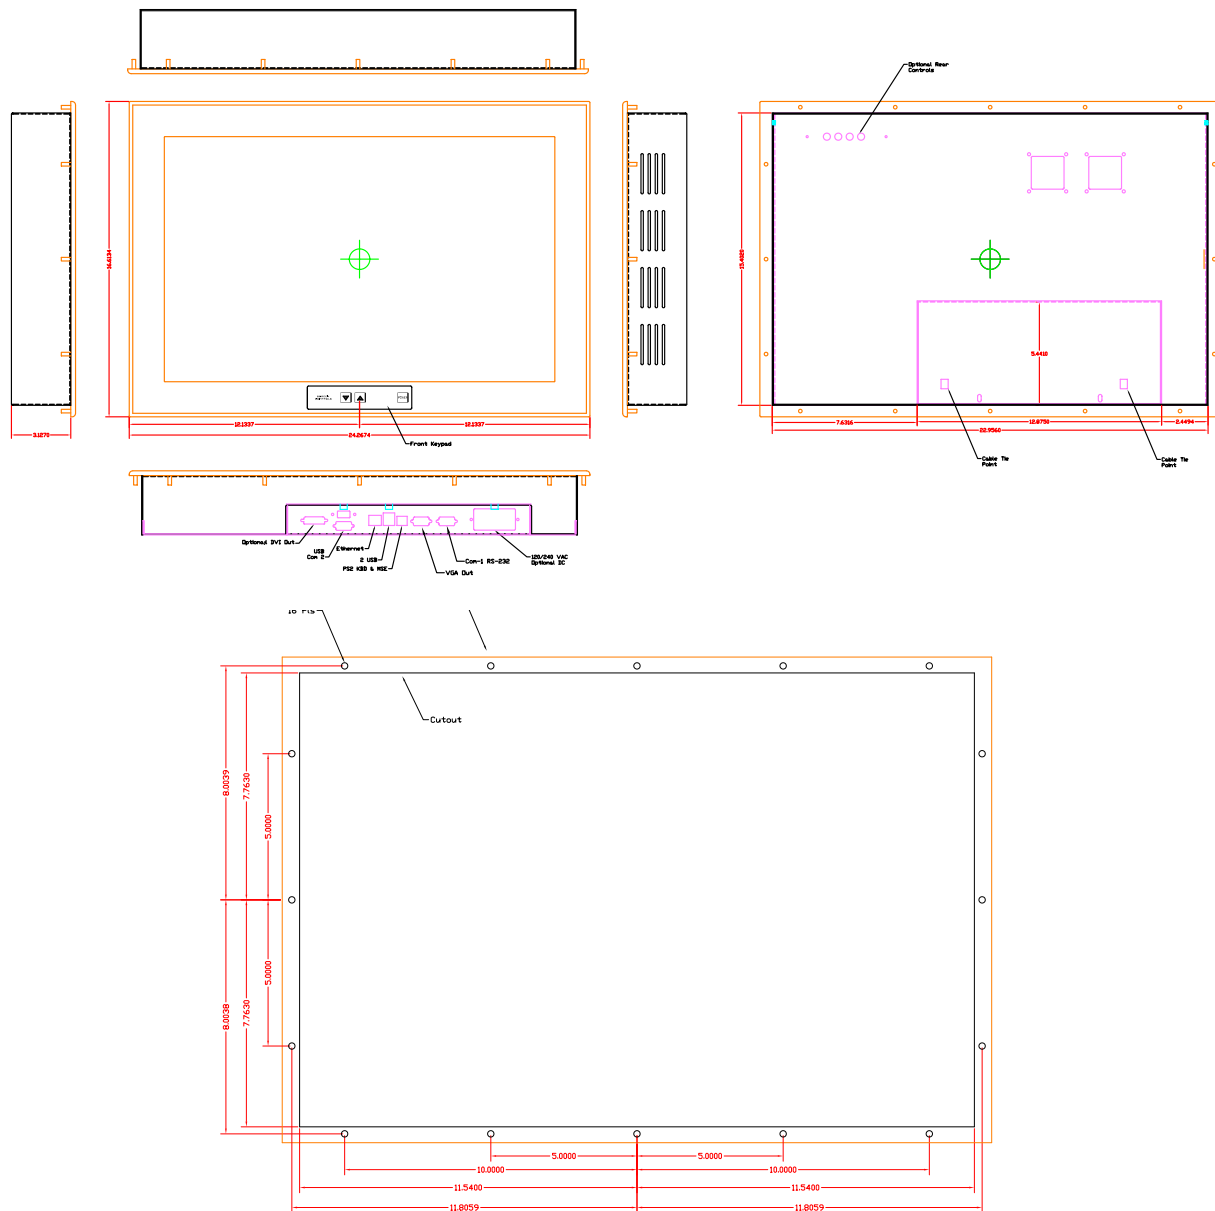

These technical and mechanical resources are subject to change without notice.



AbraxSys
RUGGED LCD SOLUTIONS

(800) 883-9050

info@abraxsyscorp.com

www.abraxsyscorp.com

6161 Keller's Church Road, Units 6151B, 6161A, 6161B, 6171A & 6171B
Pipersville, Pennsylvania 18947 U.S.A.